HARDLINE

COMMERCIAL REFRIGERATION & FOODSERVICE EQUIPMENT

PROJECT		QUOTE #	
ITEM #		AIA #	
QTY		SIS #	
APPROVAL			

UNDERCOUNTER REFRIGERATOR

REF-UC-48R

Two-Door Undercounter Refrigerator



OVERVIEW

Stainless steel undercounter refrigerator sized to fit beneath standard work surfaces. R290 natural refrigerant with forced-air cooling, digital temperature control and automatic defrost.

STANDARD FEATURES

- 430 stainless steel exterior and doors, 201 stainless steel interior
- Holds 33°F to 40°F; rated for 100°F ambient
- Forced-air (ventilated) refrigeration system
- Digital controller with temperature display
- Automatic defrost
- Self-closing doors
- (2) plastic-coated steel shelves, 88 lb capacity each
- Polyurethane foam insulation (cyclopentane blown)
- R290 natural hydrocarbon refrigerant
- 115V cord and NEMA 5-15P plug

CAPACITY	DOORS	SHELVES	TEMPERATURE	ELECTRICAL
12 cu. ft.	2	2	33°F to 40°F	115V / 2.4A

WARRANTY • USA & CANADA

3 years parts and labor

5 years compressor

See the Hardline Limited Warranty for complete terms. Warranty service: 1-888-789-4118 or service@hardline-usa.com.

CERTIFICATIONS

- cETLus Listed: UL 471 and CSA C22.2 No. 120
- ETL Sanitation: NSF/ANSI 7

OPTIONS & ACCESSORIES

Contact Hardline for available options and accessories.

HARDLINE

COMMERCIAL REFRIGERATION & FOODSERVICE EQUIPMENT

PROJECT		QUOTE #	
ITEM #		AIA #	
QTY		SIS #	
APPROVAL			

REF-UC-48R SPECIFICATIONS

EXTERIOR DIMENSIONS

Width	47.2"	1,199 mm
Depth	29.5"	749 mm
Height	35.2"	894 mm

INTERIOR DIMENSIONS

Width	42.6"	1,082 mm
Depth	19.8"	503 mm
Height	23.5"	597 mm
Net capacity	12 cu. ft.	340 L

ELECTRICAL

Voltage	115V / 60Hz / 1-ph
Amps	2.4 A
Watts	270 W
Plug	NEMA 5-15P
Compressor	1/3 HP

REFRIGERATION

Refrigerant	R290	
Temperature range	33°F to 40°F	1°C to 4°C
System	Forced air (ventilated)	
Defrost	Automatic	
Controller	Digital, with display	
Max. ambient	100°F	38°C

CONSTRUCTION

Exterior / doors	430 stainless steel	
Interior	201 stainless steel	
Insulation	Polyurethane (C-pentane)	
Shelves	(2) plastic-coated steel	
Shelf capacity	88 lb each	39.9 kg
Doors	Self-closing	


SHIPPING

Net weight	209 lb	94.8 kg
Shipping weight	300 lb	136.1 kg
Carton (W x D x H)	50" x 32.3" x 38.2"	1,270 x 820 x 970 mm
Shipping cube	35.7 cu. ft.	1011 L


DIMENSIONS

Overall envelope dimensions. Not to scale.

FRONT VIEW

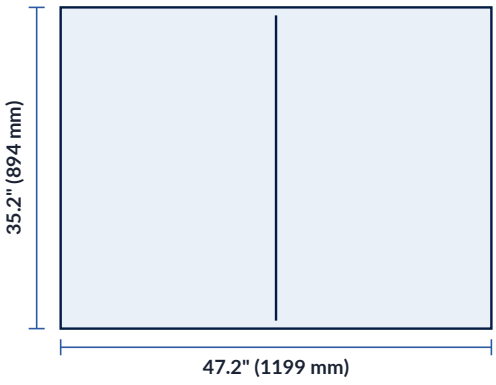

SIDE VIEW

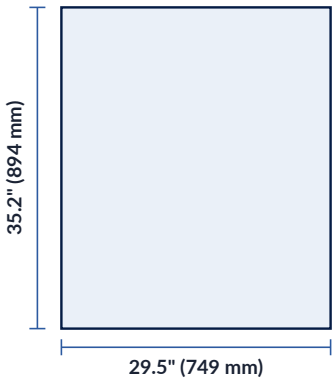

TOP VIEW

