HARDLINE

COMMERCIAL REFRIGERATION & FOODSERVICE EQUIPMENT

| | | | |
|---|---|---|---|
| PROJECT | | QUOTE # | |
| ITEM # | | AIA # | |
| QTY | | SIS # | |
| APPROVAL | | | |

UNDERCOUNTER FREEZER

# REF-UC-60F

## Two-Door Undercounter Freezer



## OVERVIEW

Stainless steel undercounter freezer sized to fit beneath standard work surfaces. R290 natural refrigerant with forced-air cooling, digital temperature control and automatic defrost.

## STANDARD FEATURES

- 430 stainless steel exterior and doors, 201 stainless steel interior
- Holds -7°F to 0°F; rated for 100°F ambient
- Forced-air (ventilated) refrigeration system
- Digital controller with temperature display
- Automatic defrost
- Self-closing doors
- (2) plastic-coated steel shelves, 88 lb capacity each
- Polyurethane foam insulation (cyclopentane blown)
- R290 natural hydrocarbon refrigerant
- 115V cord and NEMA 5-15P plug

| CAPACITY | DOORS | SHELVES | TEMPERATURE | ELECTRICAL |
|---|---|---|---|---|
| 15 cu. ft. | 2 | 2 | -7°F to 0°F | 115V / 4.5A |

WARRANTY • USA & CANADA

### 3 years parts and labor

**5 years compressor**

See the Hardline Limited Warranty for complete terms. Warranty service: 1-888-789-4118 or service@hardline-usa.com.

## CERTIFICATIONS

- cETLus Listed: UL 471 and CSA C22.2 No. 120
- ETL Sanitation: NSF/ANSI 7

## OPTIONS & ACCESSORIES

Contact Hardline for available options and accessories.

HARDLINE

COMMERCIAL REFRIGERATION & FOODSERVICE EQUIPMENT

| | | | |
|---|---|---|---|
| PROJECT | | QUOTE # | |
| ITEM # | | AIA # | |
| QTY | | SIS # | |
| APPROVAL | | | |

# REF-UC-60F SPECIFICATIONS

| EXTERIOR DIMENSIONS | | |
|---|---|---|
| **Width** | 60.2" | 1,529 mm |
| **Depth** | 29.5" | 749 mm |
| **Height** | 35.2" | 894 mm |

| INTERIOR DIMENSIONS | | |
|---|---|---|
| **Width** | 55.6" | 1,412 mm |
| **Depth** | 19.8" | 503 mm |
| **Height** | 23.5" | 597 mm |
| **Net capacity** | 15 cu. ft. | 425 L |

| ELECTRICAL | |
|---|---|
| **Voltage** | 115V / 60Hz / 1-ph |
| **Amps** | 4.5 A |
| **Watts** | 345 W |
| **Plug** | NEMA 5-15P |

| REFRIGERATION | | |
|---|---|---|
| **Refrigerant** | R290 | |
| **Temperature range** | -7°F to 0°F | -22°C to -18°C |
| **System** | Forced air (ventilated) | |
| **Defrost** | Automatic | |
| **Controller** | Digital, with display | |
| **Max. ambient** | 100°F | 38°C |


| CONSTRUCTION | | |
|---|---|---|
| **Exterior / doors** | 430 stainless steel | |
| **Interior** | 201 stainless steel | |
| **Insulation** | Polyurethane (C-pentane) | |
| **Shelves** | (2) plastic-coated steel | |
| **Shelf capacity** | 88 lb each | 39.9 kg |
| **Doors** | Self-closing | |

| SHIPPING | | |
|---|---|---|
| **Net weight** | 282 lb | 127.9 kg |
| **Shipping weight** | 330 lb | 149.7 kg |
| **Carton (W x D x H)** | 63" x 32.3" x 38.2" | 1,600 x 820 x 970 mm |
| **Shipping cube** | 44.98 cu. ft. | 1274 L |


## DIMENSIONS

*Overall envelope dimensions. Not to scale.*

FRONT VIEW

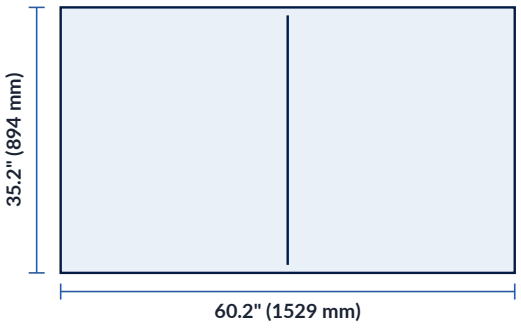


SIDE VIEW




TOP VIEW

